
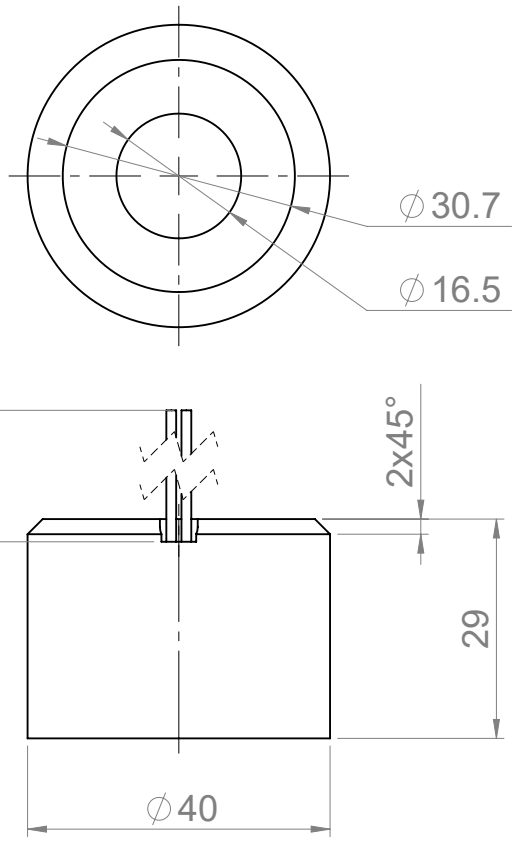


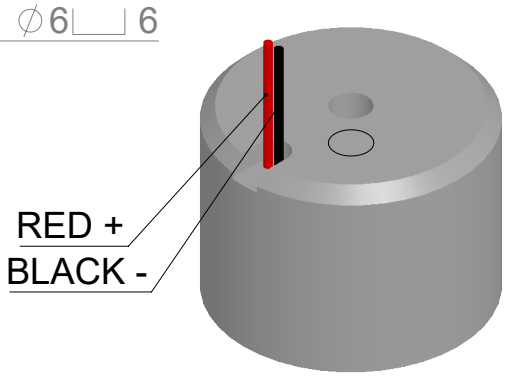

Holding force [N]:	400
Voltage [VDC]:	24 ±10%
Duty cycle [%]:	15
Thermal ins. Class:	E
Device protection:	IP65
Terminal cover:	IP00
Power [W]:	16.5
Device to:	DIN VDE 0580
Surface protection:	Fe/Zn10
Armature thickness [mm]:	4.5

REVISION TABLE

ZONE	REV	REASON	DATE	APPROVED
	A00			

Tolerance: DIN 7167 (DIN ISO 286-1)
General tolerance: DIN ISO 2768 - m

Material: Carbon Steel
Coating: Zn

Weight: *230 [g]*

	Date	Name
Drawn	7/28/2025	MSK
Checked	7/28/2025	N/A

UNIMAGNET s.r.o.

Na Padesátníku I
161 00 Praha 6
Česká republika

UNIMAGNET

Name: EMP-4029-24V

Scale: 1:1

Draw. No.: EMP-4029-24V
Rev. A00
Sheet: 1 / 1

Alt.name:

©2019 UNIMAGNET S.R.O. JAKÁKOLIV REPRODUKCE ČÁSTI NEBO CELKU BEZ SOUHLASU UNIMAGNET S.R.O. JE ZAKÁZÁNA