
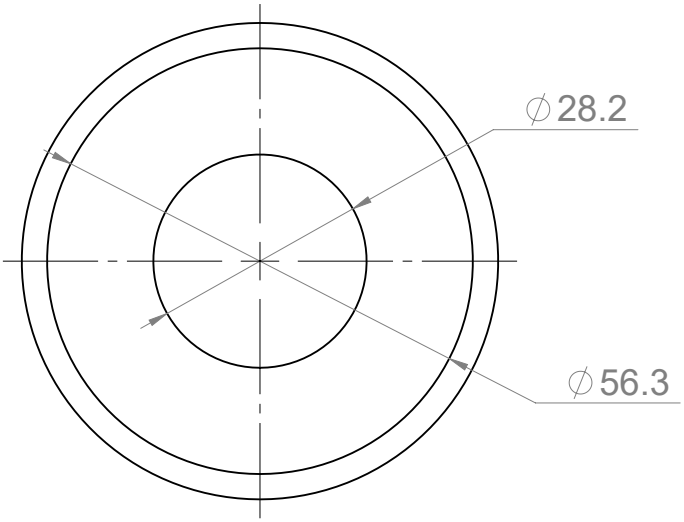
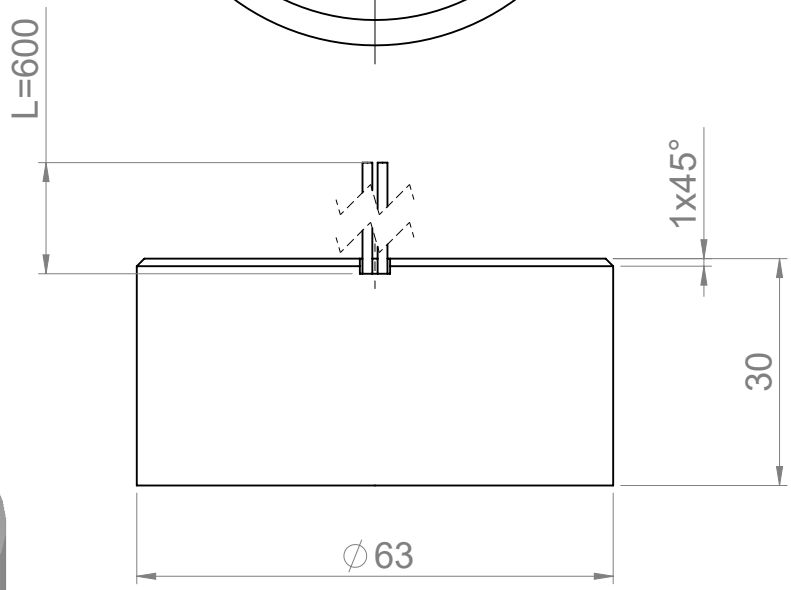
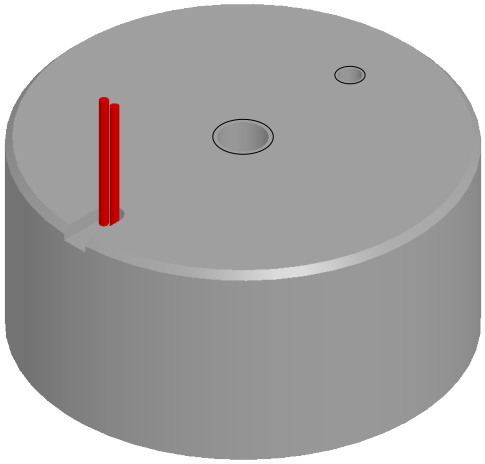


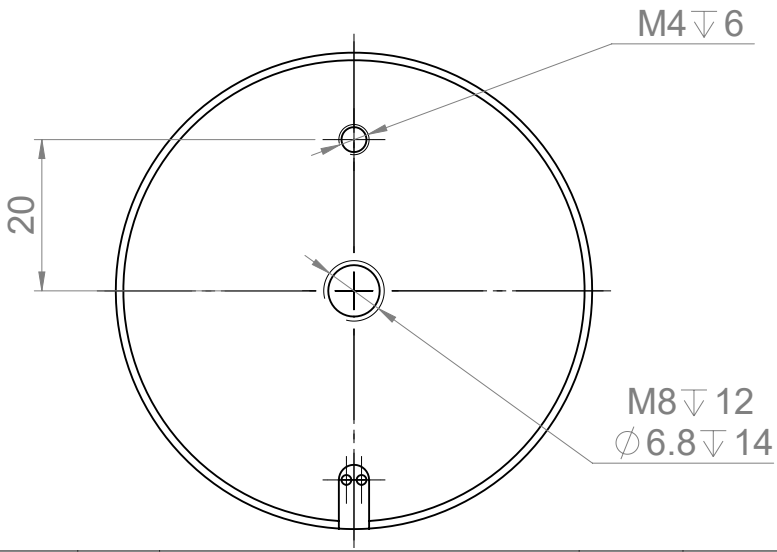


| | |
|---|---|
| Holding force [N]: | 1050 |
| Voltage [VDC]: | 24 ±10% |
| Duty cycle [%]: | 100 |
| Thermal ins. Class: | E |
| Device protection: | IP65 |
| Terminal cover: | IP00 |
| Power [W]: | 9 |
| Device to: | DIN VDE 0580 |
| Surface protection: | Fe/Zn10 |
| Armature thickness [mm]: | 7 |

REVISION TABLE

| ZONE | REV | REASON | DATE | APPROVED |
|---|---|---|---|---|
| | A00 | | | |

Tolerance: DIN 7167 (DIN ISO 286-1)

General tolerance: DIN ISO 2768 - m

Material: Carbon Steel

Coating: Zn

Weight: *550 [g]*

| | Date | Name |
|---|---|---|
| Drawn | 7/28/2025 | MSK |
| Checked | 7/28/2025 | N/A |

**UNIMAGNET s.r.o.**

Na Padesátníku I
161 00 Praha 6
Česká republika

UNIMAGNET

Name: EMS-6330-24V

Scale: 1:1

Draw. No.: EMS-6330-24V

Rev. A00

Sheet: 1 / 1

Alt.name:

©2019 UNIMAGNET S.R.O. JAKÁKOLIV REPRODUKCE ČÁSTI NEBO CELKU BEZ SOUHLASU UNIMAGNET S.R.O. JE ZAKÁZÁNA